


1011-2

SPECIFICATION SHEET  
WWW.CONEN-SYSTEMS.COM

## PROJECTION SCREEN WITH CRANK DRIVE - "SCALA II"

AVAILABLE IN DIFFERENT FORMATS

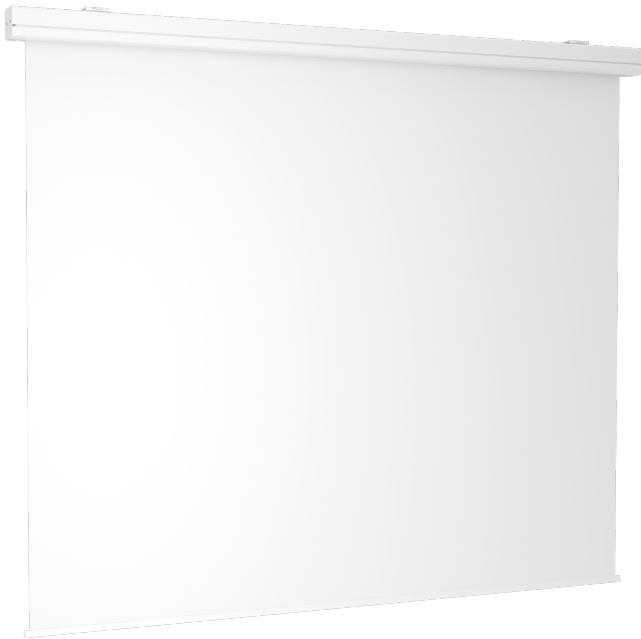

### PRODUCT

Every projection screen must fit the room conditions so that you can get the maximum benefit. The Scala II premium roll-up screen is the optimal solution for school, office or conference rooms. It can be mounted visibly on walls or ceilings, as well as in suspended ceilings. There is a revision possibility of the entire projection screen without disassembly.

The standard color of the aluminum housing (W 12.5 x H 12.5 cm) is RAL 9016 Traffic White. Other colors are optionally available according to RAL Classic, please contact us!

Visible wall/ceiling mounting or in suspended ceilings?

For visible wall or ceiling mounting, you can use the Quick mounting set for quick and easy installation: position - hook in - secure. Mounting grooves on all sides of the housing give you flexible mounting options; perfectly adaptable to the respective conditions on site. Vertical readjustment of the housing is possible.


For picture walls that are to be installed flush with the ceiling, we recommend our professional installation system for suspended ceilings with pre-assembly frame.

If the existing furnishings do not allow direct wall mounting, you can order wall spacers for this purpose. With Scala II you have the revision possibility of the entire projection screen incl. technology without disassembly. Simple installation in suspended ceiling systems, without additional on-site inspection openings.


### FEATURES

- aluminum housing W 12.5 x H 12.5 cm
- powder coated in RAL 9016 traffic white
- revisable without disassembly!
- Mounting grooves on all sides of the housing allow flexible mounting
- crank drive-maintenance-free gear with removable crank rod
- formats up to 375 x 234 cm available
- Screen surface: Polar - meets the requirements of DIN4102-B2
- for wall/ceiling mounting, optional: installation system for suspended ceiling
- Construction DIN 56950-4: 2015 Safety requirements and tests for prefabricated projection screens

### Accessories




Wall spacer 30 cm (for Dolomit II / Scala II)



Wall spacer 40 cm (for Dolomit II / Scala II)



Crank drive - left



Wall spacer 20 cm (for Dolomit II / Scala II)



Ceiling mounted



Wall mounted

---

Conen Systems GmbH  
Conenstr. 4  
54497 Morbach-Gonzerath  
Germany

T +49 5251 50012-0  
E [sales@conen-systems.com](mailto:sales@conen-systems.com)

[www.conen-systems.com](http://www.conen-systems.com)

© Copyright by Conen Systems GmbH

02/19/2025  
Page 2/2